



Installation instructions for Nelson-Rigg® CL-75S

Read instructions carefully before installation. If you have any questions or something is unclear, please contact us or your dealer for clarification. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.

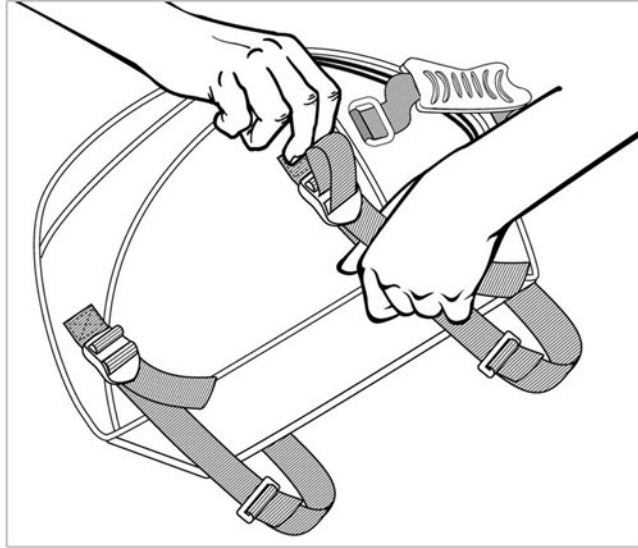

Begin by loosening straps to allow enough room to slide over seat or rear cowl section.

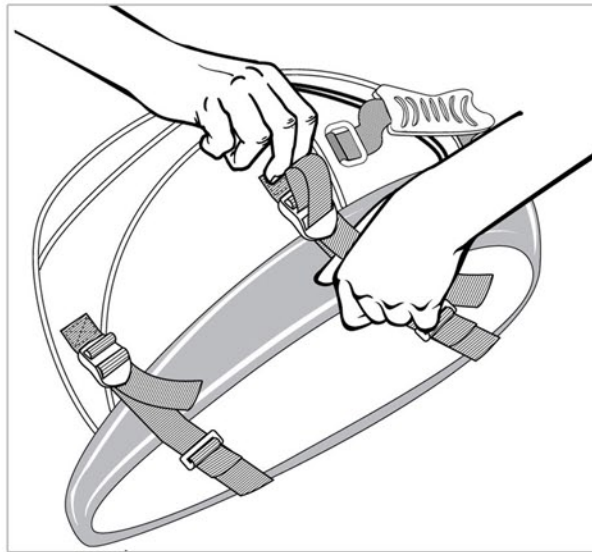

Remove and position the Tail Pack on passenger seat or rear cowl. Secure the tail pack by adjusting the side straps as shown to hold the bag snug. Straps have been intentionally made long to accommodate a wide variety of seat sizes. Make sure any extra straps are placed under the seat or trimmed to fit.

Before use, check to make sure that any part of the bag and also the straps are positioned with a minimum of 1" clearance from the exhaust pipe or any moving part of the motorcycle.

Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less.

Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury.

Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

www.nelsonrigg.com

it's not just a bike®

