



Installation instructions for Nelson-Rigg® Tail Pack CL-80, CL-85, CL-90, SLR-55


Read instructions carefully before installation. Diagrams show typical installation, your motorcycle may be different, use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.

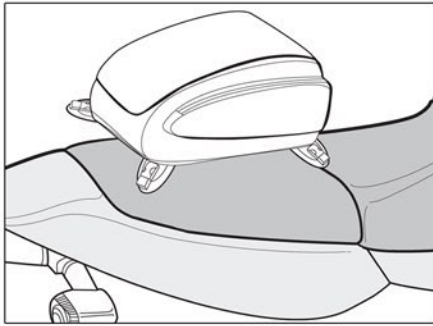


Position the tail pack on motorcycle passenger seat or rear cowl making sure the bag is centered. Always store heavier items in the bottom of the bag for better weight distribution.

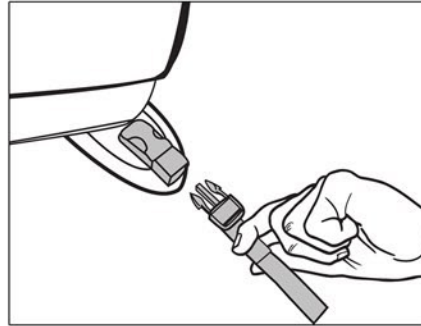


Connect the included 4 straps with hooks to the to the opposite buckle on the bag flap.

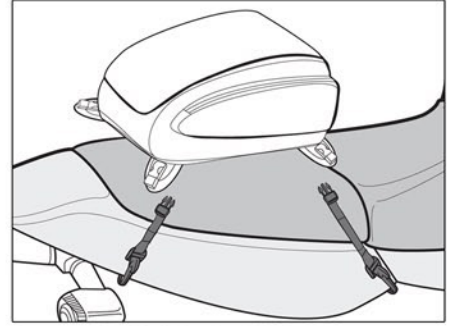


Secure the Tail Pack with the straps as shown. Where possible, make use of solid attachment points such as the frame or passenger footpegs that are part of the motorcycle. Make sure that bag and straps are free from any moving part of the bike or any surfaces that may get hot.

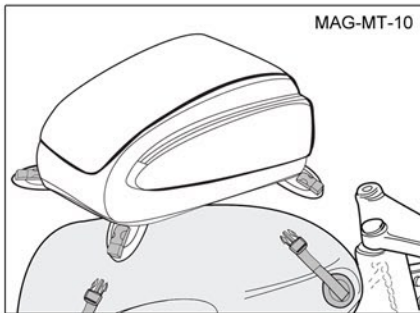


MAG-MT-10




Optional **MAG-MT-10** magnetic mounting kit converts this bag into a magnetic tank bag. Simply connect our 4 lightweight but powerful magnets into the female buckles on bag flaps and adjust to fit the contours of your tank.

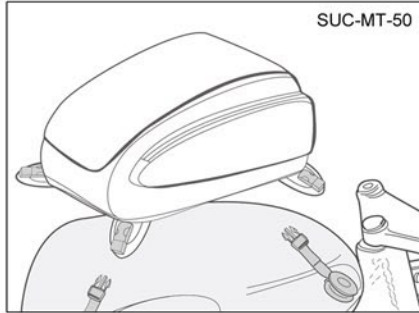

SUC-MT-50



Optional **SUC-MT-50** suction cup mounting kit converts this bag into a tank bag able to securely mount to any painted surface. Simply connect our 4 powerful suction cups into the female buckles on bag flaps and adjust to fit the contours of your tank.

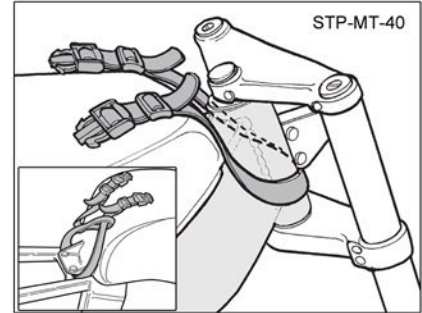

STP-MT-40



Optional **STP-MT-40** strap mount kit converts this bag into a strap mount tank bag. Simply connect our 2 straps as shown allowing this bag to mount to tanks of all shapes and sizes.

Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less.

Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury.

Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

www.nelsonrigg.com

it's not just a bike®



Nelson-Rigg USA, Inc. 3518-A Lake Center Drive, Santa Ana, CA 92704 • 714.850.1811 • fax 714.850.1848

All Nelson-Rigg products are made to the highest standards of quality and finish, providing unequalled strength, durability and function. Our accessories are warranted to be free from defects in materials and workmanship during the specified warranty period and applies only to the original purchaser of the product with the original sales receipt. To obtain warranty service, you must contact Nelson-Rigg at (714) 850-1811 or via e-mail at info@nelsonrigg.com to obtain a return authorization number. Visit our website or contact us for more info on our warranty and procedures. Please complete the warranty form below or register at (<https://www.nelsonrigg.com/store/warranty.aspx>) to activate your warranty within 30-days from date of purchase. All items returned for warranty evaluation must still be accompanied with a copy of the original proof of purchase. During the warranty period Nelson-Rigg, at our discretion will repair or replace the product if it becomes defective, malfunctions or otherwise fails to conform to this warranty and return it to you free of charge (within USA only).