


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.




With bag sitting on a luggage rack or passenger seat, loosen Velcro® straps. With strap passing through "D" ring, slide over your backrest using as many straps as your backrest size will accommodate. Pull to tighten and lay the strap back onto itself, fastening with Velcro®.

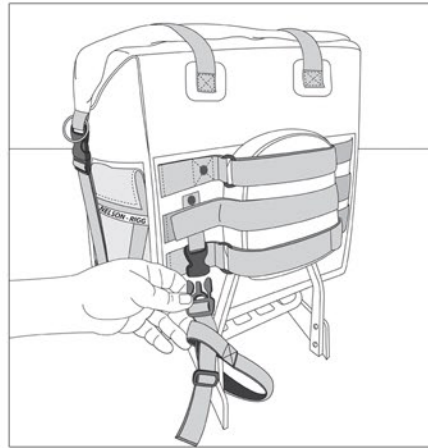

Take the side straps with male buckle on one end and loop on the other and loop it around the backrest, luggage rack or secure body part. Pass the male buckle through the loop creating a noose before re-attaching to the bag. Adjust strap and tighten.



Make sure bag is secure with little if any motion up and down or left to right. If the Velcro® straps are not long enough to go around your backrest, visit our website for strap extensions. These will make the existing straps longer to accommodate wider and thicker backrests.

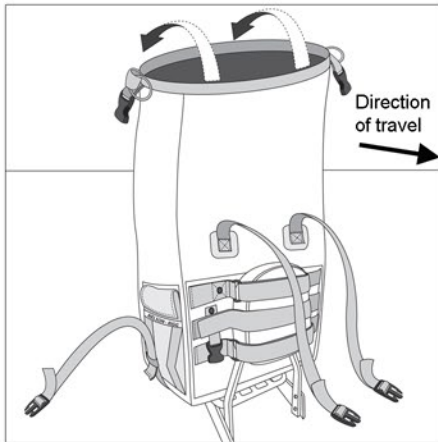

Pack contents in bag with heavier items at the bottom for better weight distribution and balance. Close the top opening while pushing out as much air as possible. Roll the now closed end down a minimum of 3 times. Be sure to roll opening away from direction of travel.



The less contents in bag the more you can roll. Once tight, connect the male and female ends on each side of the bag and pull tight. Then secure the 2 front and rear compression straps over the rolled top.



When using with smaller SVT-250 top bag, fill with contents per previous instructions and place on top of main bag. Secure the long straps on main bag over the top bag passing through the small loops and connecting to the buckles on opposite side. Then reconnect the side straps from the bottom of the top bag but passing through the metal "D" rings on the main bag connecting straps. Pull to secure. SVT-250 is included with SVT-750.

Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less. Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury. **Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.**

3518-A Lake Center Dr Santa Ana, CA 92704
 Tel (714)850-1811 Fax (714)850-1848
 e-mail: info@nelsonrigg.com www.nelsonrigg.com

