



## Strap Mount Tank Bag Instructions


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts. It is the riders responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position, always check for proper mounting position after loading and before each and every ride.

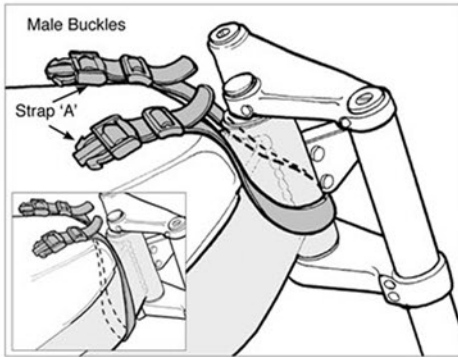


Using Strap 'A' with 2 male buckles on either end, connect one side to a female buckle on the front of tank bag. Loop opposite side around the frame or steering head behind the triple clamp making sure the strap is not pinched by the steering stops or displacing control cable or hoses. Adjust the strap length so the clips lay on the front of the fuel tank just behind the triple clamp. Clip remaining male buckle into open female buckle on tank bag.

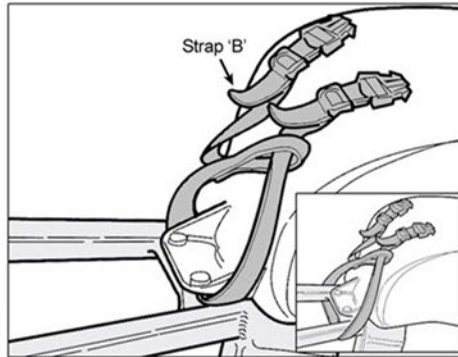

Using Strap 'B' remove or raise the seat of your bike and either pass one of the buckles around the frame tubes or rear fuel tank or pass the loop in the middle of strap 'B' around the frame tubes or rear fuel tank and feed one of the male buckle through the loop securing the strap to your bike. Avoid sharp edges that may damage the nylon strap when it is tight.

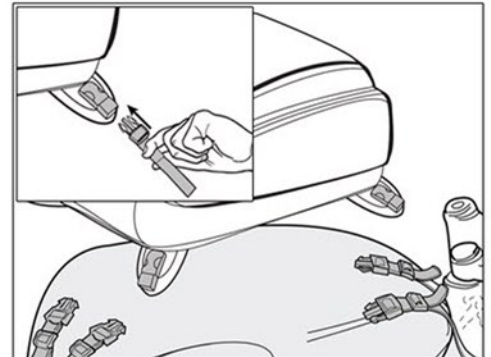


Now fasten the male buckles on both strap 'A' & 'B' into the female buckles on the tank bag and adjust to fit snug. When seated on the motorcycle, make sure you can freely operate all the controls with the tank bag in place.

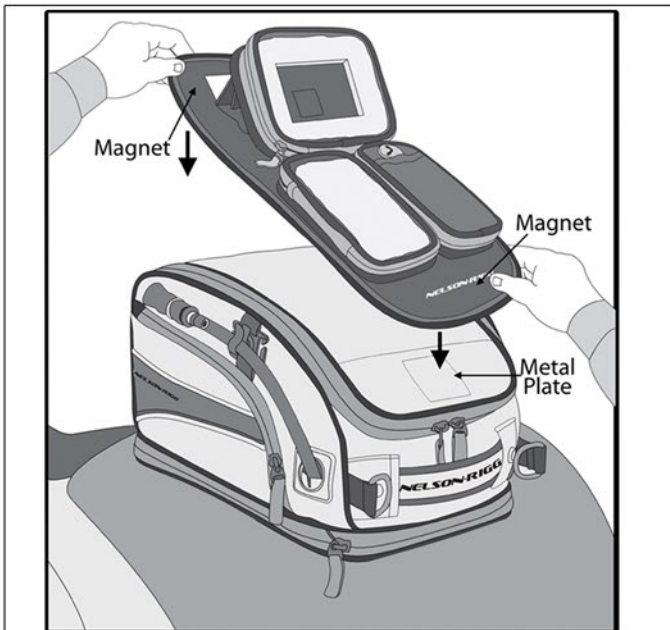

To convert your tank bag from map to GPS ready, you will need to purchase our CL-GPS-MG Journey GPS Mate. First, make sure that the clear map pocket and bottom of the GPS Mate are free from any dust dirt or road grime. Position the GPS Mate on top of the map pocket on your CL-2015 tank bag aligning the magnets in the GPS Mate to the metal plates sewn inside the front of the lid and back of bag. The CL-GPS can also be used by itself on any metal tank as a GPS and phone holder.

### To use as backpack

Lengthen the shoulder strap to its max length. Attach one of the clips of the shoulder strap to one of the "D" rings located next to the flush mounted handle. Then pass the other clip through the single "D" ring on the opposite side of the bag then connecting to the other "D" ring by the handle.

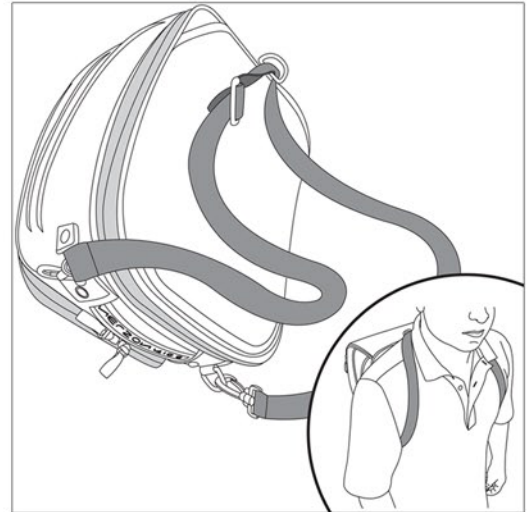

### Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less.

Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury.

Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

3518-A Lake Center Dr Santa Ana, CA 92704  
Tel (714)850-1811 Fax (714)850-1848  
e-mail: [info@nelsonrig.com](mailto:info@nelsonrig.com) [www.nelsonrigg.com](http://www.nelsonrigg.com)

