

Magnetic Tank Bag Instructions

Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.

WARNING

Magnetic Tank bags are intended or used on bikes with metal tanks. These bags WILL NOT WORK on bikes with plastic, aluminum or fiberglass tanks.

The strong magnets used to retain the bag to the gas tank could effect a variety of electronic devices and electronic storage units such as: cell phones, lap top computers, MP3 players, digital cameras, etc. Make sure if carrying any of these, they are stored as far away from the magnets as possible. The office organizer under the lid would be better suited for such items, but store at your own risk. Make sure bag is free from dirt, dust or metal particles prior to fastening to gas tank.

Always remove this tank bag when not in use. Prolonged use without removal can have an effect on metallic paint.

Installation:


Always store heavier items in the bottom of the bag for better weight distribution and balance. Clean gas tank before installing Tank Bag. Open magnetic flaps and hold against bag while gently positioning the bag on gas tank. Make sure the bag does not interfere with the controls or your ability to safely operate the motorcycle. Once in place, slowly lower each flap onto the tank to secure the bag.

Removal:

When removing or repositioning your bag, please lift each flap off the tank first and do **not** drag the bag off or over the bike. This will help prevent any scratching or tipping the bike over.


Safety Tether Strap:

The adjustable shoulder strap can also be used as a tether strap for added security. Loop the strap around the steering head of your frame behind the triple clamps making sure the strap is not pinched by the steering stops or displacing control cable or hoses. Adjust the strap length but do not tighten. This is only a safety measure and does not need to be tight in anyway.

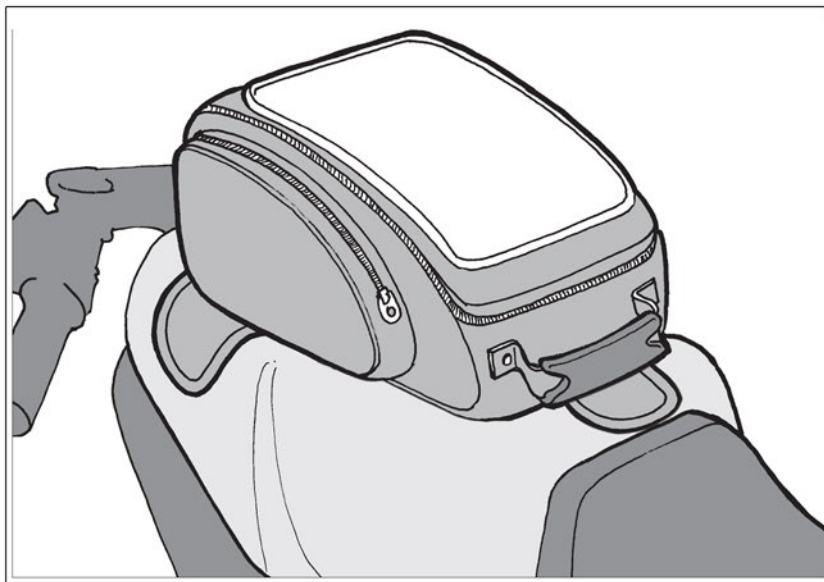

To use as backpack for CL-2020

Lengthen the shoulder strap to its max length. Attach one of the clips of the shoulder strap to one of the "D" rings located next to the flush mounted handle. Then pass the other clip through the single "D" ring on the opposite side of the bag then connecting to the other "D" ring by the handle.

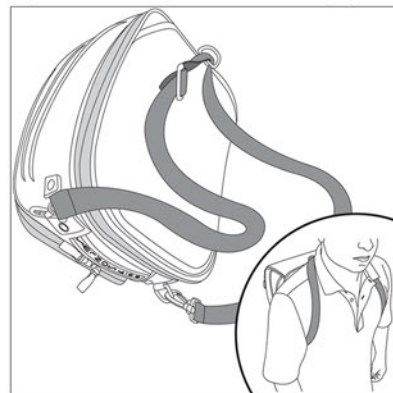

Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less.

Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury.

Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

3518-A Lake Center Dr Santa Ana, CA 92704
Tel (714)850-1811 Fax (714)850-1848
e-mail: info@nelsonrigg.com www.nelsonrigg.com

