



## Strap Mount Tank Bag Instructions


Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.

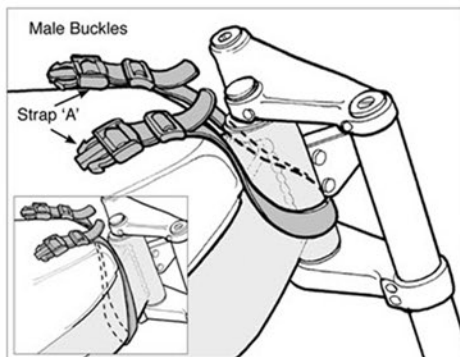

Using Strap 'A' with 2 male buckles on either end, connect one side to a female buckle on the front of tank bag. Loop opposite side around the frame or steering head behind the triple clamp making sure the strap is not pinched by the steering stops or displacing control cable or hoses. Adjust the strap length so the clips lay on the front of the fuel tank just behind the triple clamp. Clip remaining male buckle into open female buckle on tank bag.

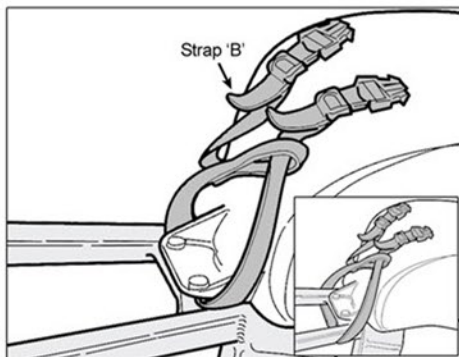


Using Strap 'B' remove or raise the seat of your bike and either pass one of the buckles around the frame tubes or rear fuel tank or pass the loop in the middle of strap 'B' around the frame tubes or rear fuel tank and feed one of the male buckle through the loop securing the strap to your bike. Avoid sharp edges that may damage the nylon strap when it is tight.

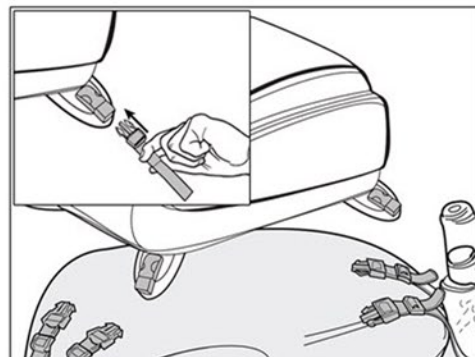


Now fasten the male buckles on both strap 'A' & 'B' into the female buckles on the tank bag and adjust to fit snug. When seated on the motorcycle, make sure you can freely operate all the controls with the tank bag in place.

### To use as backpack CL-2020


Lengthen the shoulder strap to its max length. Attach one of the clips of the shoulder strap to one of the "D" rings located next to the flush mounted handle. Then pass the other clip through the single "D" ring on the opposite side of the bag then connecting to the other "D" ring by the handle.

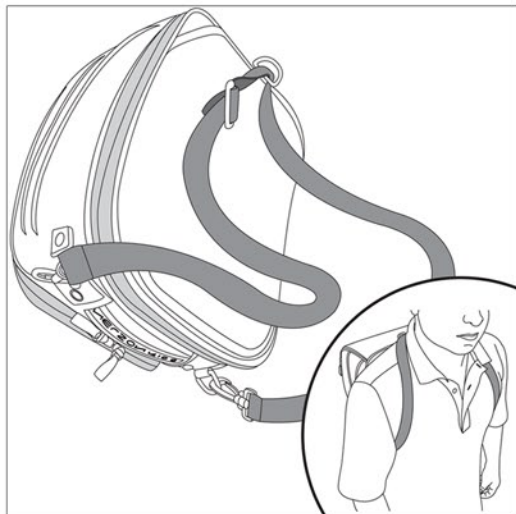


### Quickly and easily convert you tank bag to mount using magnets, suction cups or even double as a tail pack using one of these optional mounting kits.



Optional MAG-MT-10 magnetic mounting kit converts this bag into a magnetic tank bag. Simply connect our 4 lightweight but powerful magnets into the female buckles on bag flaps and adjust to fit the contours of your tank.



Optional SUC-MT-50 suction cup mounting kit converts this bag into a tank bag able to securely mount to any painted surface. Simply connect our 4 powerful suction cups into the female buckles on bag flaps and adjust to fit the contours of your tank.



Optional TLPK-MT-20 tail pack mounting kit converts this bag into a versatile tail pack. Simply connect the 4 webbing straps into the female buckles on bag flaps and attach the nylon hooks to a solid part of your bike.

#### Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less. Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury. Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.

3518-A Lake Center Dr Santa Ana, CA 92704  
Tel (714)850-1811 Fax (714)850-1848  
e-mail: info@nelsonrigg.com www.nelsonrigg.com

